

122301

Z-RL3 Remote LED w/ "Fire" Text, Square

General

The 122301 (Z-RL3) is a conventional remote indicator designed for connection to conventional or addressable fire alarm detectors. It features a high intensity red LED indicator positioned centrally on a white square plastic moulding.

For surface mount applications a suitable back box is required.

Application

The siting of detectors in confined or concealed spaces often result in the alarm indicator on the detector itself becoming obscured or hidden. In order to clearly show the state of a detector when installed in areas such as ceiling or floor voids, a remote LED indicator can be wired to the detector base and installed in any prominent position.

The 122301 (Z-RL3) is designed to fit onto a standard recessed or surface mounting square conduit box and may be connected with standard fire alarm cable to the detector base. Terminals are provided all Ziton conventional and addressable fire alarm detector bases for connection of this unit.



Details

- High intensity red LED indication
- With 'Fire Detector Operated' text

122301

Z-RL3 Remote LED w/ "Fire" Text, Square

Technical specifications

General

Compatibility	Ziton conventional and addressable devices that support a remote LED connection
---------------	---

Electrical


Operating voltage	5 - 28 VDC
Current consumption	24 mA at 24 VDC (via resistor)

Physical

Physical dimensions	86.5 x 86.5 x 27.4 mm
Net weight	38 g

Environmental

Environment	Indoor
IP rating	IP42

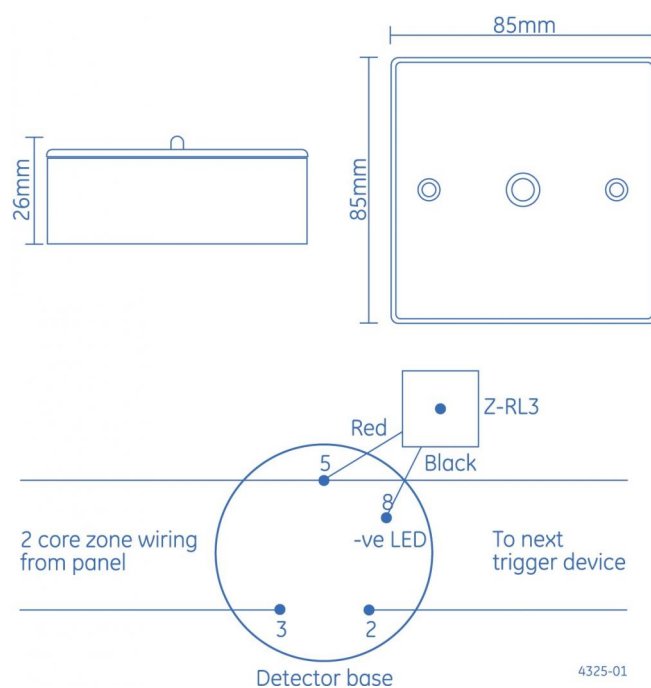

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

Last updated on 24 January 2019 - 18:48

